


Product Specification

Flashing Tape

Flashing Tape is used for detailing corners, pipe boots and T-joints on SealEco membranes. The tape provides immediate adhesion, is extremely flexible and can be formed to fit irregular shapes and surfaces. Flashing Tape should always be used in conjunction with Single Ply Primer.

Technical specifications

Base:	Synthetic Rubber
Colour:	Black
Thickness:	1.14 mm

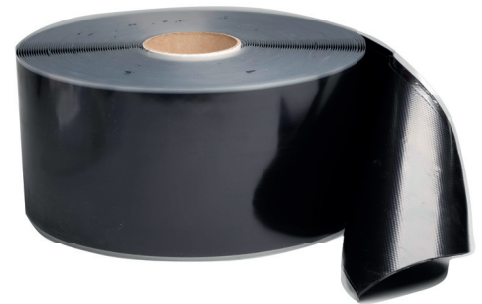

Packaging

Width:	152 mm	229 mm	305 mm	457 mm
Roll length:	30.5 m	15.3 mm	15.3 mm	15.3 m
Rolls/case:	2 pcs	2 pcs	1 pce	1 pce
Weight/case:	23.6 kg	17.7 kg	12.2 kg	17.2 kg
Cases/pallet:	18 pcs	40 pcs	45 pcs	24 pcs

Application

Flashing Tape should be installed in an ambient temperature between +5° and 40°C. The EPDM membranes to be joined should be dry, clean and free from creases or tension. If necessary, the EPDM membrane can be cleaned with Cleaning Wash 9700 before joining.

Using a marker pen or chalk, mark the proposed location of the Flashing Tape. Apply Single Ply Primer with a scrub pad over the entire area to be joined. Wait for the Primer to flash off so that it is dry to the touch but still tacky. Do not leave exposed for longer than 20 minutes (at 20°C 50% RH).

Position the Flashing Tape and press firmly using a 50 mm wide silicone seam roller. Apply pressure from the middle of the tape to the edge to eliminate any trapped air. Seal all cut edges with Sealant 5590. Consult the technical manual for further instructions.

Limitations

Flashing Tape should not be installed in temperatures below +5° and above 40°C, or during rain, mist, heavy winds or where there is a risk of condensation.

Storage

Store in a dry and cool place in original packaging.

Shelf life: 9 months in original packaging.

Safety

Please read the safety data sheet before use.