


# Product Specification

## Thermobond Steel Plate 2x1 m

Thermobond Clad Metal is used for perimeter profiles and can be cut and folded like ordinary galvanized steel sheets. The steel is galvanized and 0.6 mm thick laminated with a 0.3 mm Thermobond layer which makes it possible to weld other Thermobond based accessories.

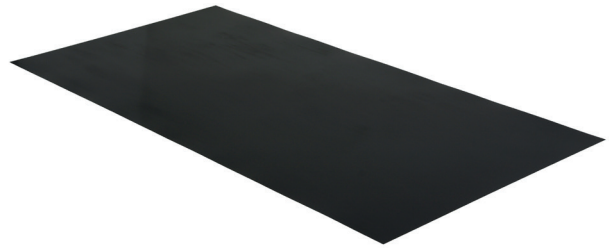

### Technical data

Width (m)	Length (m)	Thickness (mm)	Weight (kg/m <sup>2</sup> )	Package (pcs/pallet)*
1	2	0.9	4.6	50

\* Packed on pallet 2.00m x 1.00m

### Storage

Thermobond seaming technique is unique and patented by SealEco. Thermobond is based on a thermoplastic rubber (TPE-base) that can be seamed with conventional seaming methods for plastic material like hot air or hot wedge seaming.

The Thermobond material is the base for a full range of accessories that gives good system solutions combining the unique properties of an elastomeric membrane with the seaming properties of the thermoplastics.

### Application

Please read installation manual before use.