


TECHNICAL DATA SHEET

TACKY TAPE

Tacky tape is an unvulcanized tape of butyl rubber with self-adhesive properties that adheres to rubber, metal, painted surfaces, plastics and glass. The strip contains no curing system and remains plastic in temperatures between -40 °C to +80 °C.

Technical data

Base:	Unvulcanized rubber
Colour:	Black
Density:	1.26 kg/dm ³
Solids:	100 %
Consistency:	Soft with very good adhesion/tackiness
Width (mm):	40
Length (m):	40
Shelf life:	Store in a dry and cool environment (15-20 °C). Maximum storage time at these conditions is 24 months.

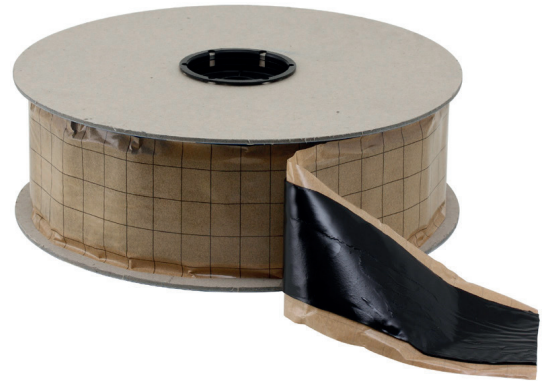

Installation

The substrate shall be dry and clean before the tape is applied. The tape should be cut to required length and lightly pressed to the substrate with the release foil still attached to the tape. Thereafter the release foil is removed and the counterpart is brought to the tape and finally the surfaces shall be firmly pressed together using a roller.

Disclaimer

Information contained in this data sheet is up-to-date and correct as at the time of issue. For latest version please always check www.sealeco.com.