


# TECHNICAL DATA SHEET

## THERMOBOND CORNER

Thermobond corners are used for covering inside and outside corners in combination with Thermobond R Splice Strip. The corners are spliced with hot air.

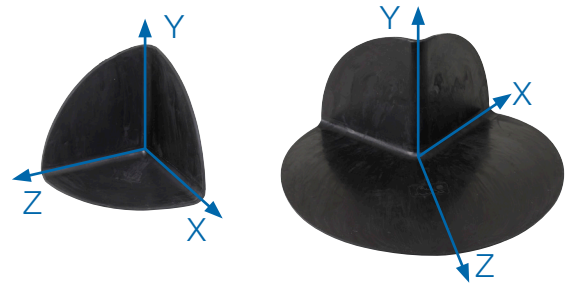

### Technical data

<b>Thickness:</b>	2.5 mm
<b>Colour:</b>	Black
<b>Shelf life:</b>	Store cool and dry in the original packaging. There are no limitations in shelf life.

### Packaging

Product	Thickness (mm)	Dimensions XYZ (mm)	Package (pcs/box)
Inside corner	2.5	X: 100 Y: 100 Z: 100	40
Outside corner	2.5	X: 100 Y: 100 Z: 125	40

### Directions for use

Thermobond seaming technique is unique and patented by SealEco. Thermobond is based on a thermoplastic rubber that can be seamed with conventional seaming methods for plastic material like hot air or hot wedge seaming. The Thermobond material is the base for a full range of accessories that gives good system solutions combining the unique properties of an elastomeric membrane with the seaming properties of the thermoplastics. Thermobond Corners are used for securing 90° angles on SealEco EPDM membranes. In case of irregular corners, Thermobond 100 Flashing has to be used.

Installations with Thermobond splicing are only authorised for installers fully trained by SealEco.

Consult our installation manuals for more information.

### Suitable substrates

Thermobond splicing can only be done on SealEco EPDM membranes. The EPDM membrane has to be clean and dry.

Oxidised surfaces have to be grinded and cleaned with Cleaning Wash 9700. Splicing is possible between -15°C and 40°C.

Splicing is not allowed during precipitation.

### Disclaimer

Information contained in this data sheet is up-to-date and correct as at the time of issue. For latest version please always check [www.sealeco.com](http://www.sealeco.com).