


# TECHNICAL DATA SHEET

## TACKY TAPE

Tacky tape is an unvulcanized tape of butyl rubber with self-adhesive properties that adheres to rubber, metal, painted surfaces, plastics and glass. The strip contains no curing system and remains plastic in temperatures between -40°C to +80°C.

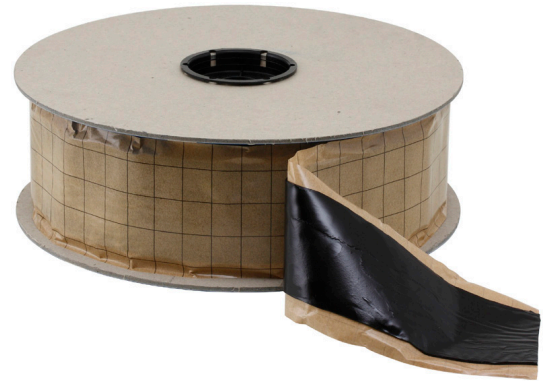

### Technical data

<b>Base:</b>	Unvulcanized rubber
<b>Colour:</b>	Black
<b>Density:</b>	1.26 kg/dm <sup>3</sup>
<b>Solids:</b>	100 %
<b>Consistency:</b>	Soft with very good adhesion/tackiness
<b>Width (mm):</b>	40
<b>Length (m):</b>	40
<b>Shelf life:</b>	24 months in a well ventilated and dry storage place at temperatures in between +5°C and 30°C.

Availability depending on country. Please contact your local supplier for more information.

### Directions for use

All surfaces should be clean, dry and free from creases or tension. If necessary, clean the surface with Cleaning Wash 9700 before joining. The tape should be cut to required length and lightly pressed to the substrate with the release foil still attached to the tape. Thereafter the release foil is removed and the counterpart is brought to the tape and finally the surfaces shall be firmly pressed together using a silicone roller.

### Disclaimer

Information contained in this data sheet is up-to-date and correct as at the time of issue. For latest version please always check [www.sealeco.com](http://www.sealeco.com).