

TECHNICAL DATA SHEET

PRELASTI FLEECE S

Prelasti Fleece S is a fleece backed EPDM roofing membrane used for exposed roofs either mechanically attached, ballasted or adhered to the substrate with adhesives or bonding bitumen. Seaming is performed with hot air (Thermobond technique) or with cold Tape Splicing technique.

The product has external fire performance classification B_{ROOF} (t1, t2, t4).



Technical data

Thickness	Thickness EPDM	Weight
2.3 mm	1.3 mm	1.7 kg/m ²
2.5 mm	1.5 mm	2.0 kg/m ²

Article	Thickness (mm)	Width (mm)	Length (m)	Seam type
Prelasti Fleece S	2.3 / 2.5	1 710	20	No edge
Prelasti Fleece S	2.3 / 2.5	1 710	60	No edge

Availability depending on country. Please contact your local supplier for more information.
Prelasti Fleece S 2.5 mm only on demand.

Physical properties

For detailed product data, please see corresponding Declaration of Performance.


Storage

Store cool and dry in the original packaging. There are no limitations in shelf life.

Approvals, Certificates & Specifications

CE: EN 13956, ATG, KOMO, Dubokeur.

B_{ROOF} (t1, t2, t4) classifications on demand.

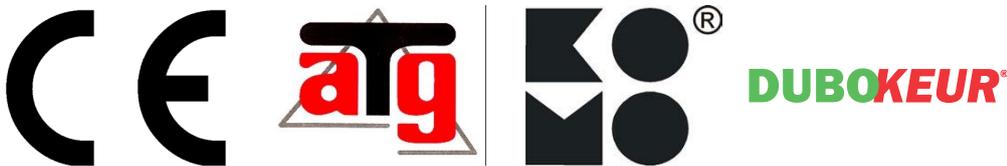

Disclaimer

Information contained in this data sheet is up-to-date and correct as at the time of issue. For latest version please always check www.sealeco.com.