


# TECHNICAL DATA SHEET

## PRELASTI FLEECE FRE

Prelasti Fleece FRE is a fleece backed EPDM roofing membrane used for exposed roofs either mechanically attached, ballasted or adhered to the substrate with adhesives or bonding bitumen. Only cold Tape Splicing technique is used.

The product has external fire performance classification  $B_{ROOF}$  (t1, t2, t4).

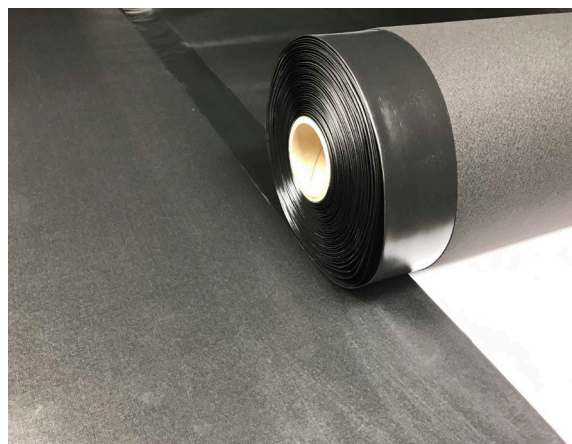

### Technical data

Thickness	Thickness EPDM	Weight
2.1 mm	1.1 mm	1.8 kg/m <sup>2</sup>

Article	Thickness (mm)	Width (mm)	Length (m)	Seam type
Prelasti Fleece FRE	2.1	1 780	20	Free Tape edge 80 mm
Prelasti Fleece FRE	2.1	1 780	60	Free Tape edge 80 mm
Prelasti Fleece FRE	2.1	3 480	20	Free Tape edge 80 mm

Availability depending on country. Please contact your local supplier for more information.

### Physical properties

For detailed product data, please see corresponding Declaration of Performance.

### Storage

Store cool and dry in the original packaging. There are no limitations in shelf life.

### Approvals, Certificates & Specifications

CE: EN 13956:12, BBA.

$B_{ROOF}$  (t1, t2, t4) classifications on demand.



### Disclaimer

Information contained in this data sheet is up-to-date and correct as at the time of issue. For latest version please always check [www.sealeco.com](http://www.sealeco.com).